

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/000611

International filing date: 18 February 2005 (18.02.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0403561.4
Filing date: 18 February 2004 (18.02.2004)

Date of receipt at the International Bureau: 26 April 2005 (26.04.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.



I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

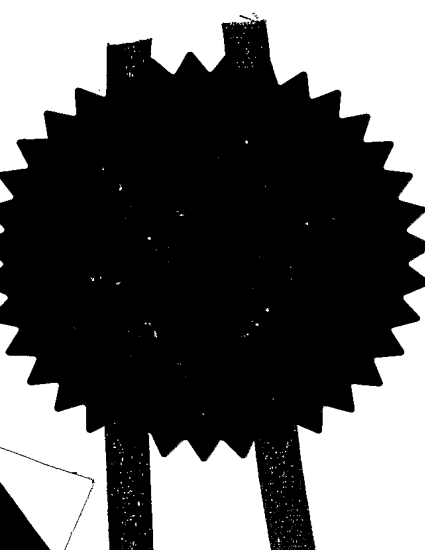

Dated 11 April 2005



18FEB04 EB74208-1 C08642
P01/7700-0.00-0403561.4 NONE

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

LA 0204

0403561.4

2. Patent application number

(The Patent Office will fill in this part)

18 FEB 2004

3. Full name, address and postcode of the or of each applicant (underline all surnames)

NORMAN MATHESON LINDSAY
19 BATCHELORS WAY
AMERSHAM Bucks HP7 9AH

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

6297261002

4. Title of the invention

LAUNCH ANALYSER WITH REAL-TIME ADAPTIVE CORRECTION

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

GRAHAM F COLES
GRAHAM COLES & CO
24 SEELEYS ROAD
BACONSFIELD
BUCKINGHAMSHIRE, HP9 1SZ
4361556001

Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description 16

Claim(s)

Abstract

Drawing(s) 6 TE H

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Norman M Lindsay

Date

17 FEB 2004

12. Name and daytime telephone number of person to contact in the United Kingdom

NORMAN LINDSAY 01494 725000

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

LAUNCH ANALYSER WITH REAL-TIME ADAPTIVE CORRECTION

TECHNICAL FIELD

This invention relates to apparatus for measuring parameters relating to the motion of a moving article and, in particular, apparatus for measuring and recording the initial velocity and spin of a golf ball, soccer ball or similar object that is launched into flight from an initial resting spot by impact from a club or other implement, predicting from the initial velocity and spin data the subsequent carry and flight duration of the ball or struck object, measuring the carry and duration of the actual flight and using the measured carry and flight duration data to correct the launch measurements and flight prediction model calibration parameters.

BACKGROUND ART

Most contemporary commercial ball launch analysers use time elapsed photography to record and analyse the initial velocity and/or spin of a ball. One or more cameras capture images of the ball at two or more instances in time after initial launch and the velocity and spin of the ball is calculated from the relative positions and orientations of the ball images at two known instants in time.

The velocity and spin sensing method as outlined above has been established practice for many years. US Pat. No. 4,063,259 issued in 1977 is one early prior art document describing the use of a still camera with electronically controlled shutter and two or more electronically controlled flash units, the above being arranged to obtain images of a ball at two instants of time shortly after impact to provide measurements of ball speed, launch angle and spin rate. More recent prior art, such as US Pat. No. 6,390,934 issued in 2002, describe the use of digital cameras and image processing software to automate and enhance the measurement of ball launch conditions.

An indirect way of measuring the spin magnitude and spin axis of a golf ball is disclosed in GB Pat. No. 2334781, granted in 2002, where only the ball velocity vectors are measured and the ball spin vectors are deduced from measurement of the club head velocity and offset at impact.

Knowing the characteristics of a ball, its launch velocity and spin vectors (as measured by the above inventions) can be used to predict the ensuing flight carry and duration. However, the accuracy of such prediction is very prone to errors arising from inaccuracies in the flight model, inaccuracies in the launch measurements and variations in atmospheric conditions (e.g. wind speed, rain effects, temperature and pressure).

The present invention aims to provide improved methods of measuring ball launch parameters by additionally sensing the actual carry distance and deviation and the flight duration to correct the launch measurements and flight prediction model calibration parameters.

One purpose of using accurate carry data to correct inaccurate launch data is that it is desirable to know what caused the outcome of a golf shot (to gain insight into a golfer's technique). A second application for this system is to identify the launch source (or "tee off" position) of different balls landing nearly simultaneously in the same general vicinity. Such a scenario obtains in golf ranges (or "driving ranges") and a benefit of the present invention is that electronic means are provided to tell each of several golfers using a golf range facility the exact outcome of their individual shots (i.e. display of carry distance and deviation) without confusion from nearly similar shots by neighbouring users of the facility.

One possible means of achieving the measurement of actual carry distance and deviation and the flight duration is disclosed in FR Pat. No. 2664503, granted in 1993, which describes the use of geophones distributed around a reception area to sense the impact of the ball as it lands. Signals corresponding to the time of arrival of the impact vibration at proximate geophones are recorded and, by analysing the time differences in these signals at different geophones, the position and time of impact can be accurately measured.

According to a first aspect of the invention, there is provided apparatus for measuring parameters relating to the motion of a moving article, the apparatus comprising one or more light sources for providing light from at least one reflecting zone of known shape or pattern on the moving article and co-acting light sensors arranged to provide a signal when it is illuminated by said light, wherein at least one light source and co-acting light sensor subtend an angle of less than 5

degrees at the said reflecting zone and common parts of the fields of view of the light source and co-acting light sensor define at least one detection plane across the path of the reflecting zone and at least one of the light sensors is arranged to sense variations in the said signal when the reflecting zone intercepts a given detection plane wherever the reflecting zone intercepts the detection plane and light reflected by different parts of the said shape or pattern is detected as the reflecting zone passes through the detection plane, the arrangement being such that the position and orientation of the detection plane relative to a reference frame is known and the time dependent displacement of the reflecting zone normal to the detection plane and the orientation of the reflecting zone about an axis within that detection plane can be determined from said signal.

According to a further aspect of the invention, the apparatus is provided in combination with one or more articles the movement of which is to be sensed, the or each of the articles being provided with a retroreflective zone and/or diffusely reflecting zone.

The article may comprise a golf ball and, according to a further aspect of the invention, there is provided a golf ball for use with the apparatus, the golf ball may be provided with at least one retroreflective zone with the remainder of the golf ball surface providing a diffusely reflective zone.

The article may comprise a golf club and, according to a further aspect of the invention, there is provided a golf club for use with the apparatus, the golf club being provided with at least one retroreflective region preferably on the clubhead and/or on the lower end of the shaft, above the clubhead.

According to a further aspect of the invention, the apparatus is provided in combination with additional sensing means to detect and measure a golf ball landing position following a golf shot and data comprising the carry distance, deviation and duration of flight of a first and subsequent shots are used to correct the ball launch calibration parameters and/or the ball flight model parameters, taking into account prevailing atmospheric conditions. The said sensing means may be optical, airborne acoustic, electromagnetic, electro-mechanical, radio frequency or other means but in a preferred embodiment, the vibration created by the ball landing impact is detected by vibration sensing means and the position and time of impact is determined from signals generated

in the said vibration sensing means. The vibration sensing means may be single devices, each attached to individual panels that vibrate on impact to indicate ball landing on the area of the panel and/or a distributed array of geophones to sense ground transmitted vibrations or the like.

According to a further aspect of the invention, golf ball launch data (comprising impact time, launch velocity vectors and launch spin vectors), predicted carry duration data, predicted distance data, predicted deviation data, actual carry duration data, actual distance data and actual deviation data are used to identify the carry and deviation of each of several golf shots occurring in time and range proximity.

Preferably, one or more light sources and co-acting light sensor subtend angles at the reflecting zone of less than 2 degrees worst case, or more preferably less than 1 degree worst case. In this context, worst case means the maximum subtended angle corresponding to the minimum expected distance between the reflecting zone and the apparatus.

For convenience, we adopt the following nomenclature:

'Detection plane' is abbreviated to DP;

The angle subtended at the reflecting zone between a light source and its co-acting light sensor is the 'observation angle';

A light source and its co-acting light sensor is a 'TXRX pair'; and

The separation between the active elements in a TXRX pair (measured normal to the DP) is the 'TXRX separation'.

Note that for small angles, the magnitude of the observation angle in radians equals the TXRX separation divided by the distance between the TXRX pair and the reflecting zone.

A preferred means of creating a DP is to arrange the active elements in a TXRX pair in close proximity (e.g. 2 to 5 millimetres apart, but not limited to this range) and some distance behind a slit aperture. The width of the slit aperture may nominally equal the TXRX separation, with the length axis of the aperture normal to the separation axis (i.e. the axis that passes through the active elements of the TXRX pair). Neglecting the finite size of the active areas in the TXRX pair

and diffraction effects at the edges of the aperture, the width of the DP in this arrangement is nearly constant throughout the useful extent of the DP and is equal to the TXRX separation (typically 3 to 4 millimetres). This controlled width DP is advantageously used in conjunction with retroreflective reflecting zones, which have much greater reflective efficiency than diffuse reflectors, with the efficiency increasing with smaller observation angles. This increased efficiency helps to compensate for spreading losses at increasing range (and thus decreasing observation angle). When the DP is not more than x millimetres in width (where x can be any number, but typically 3 to 4 millimetres), different features in the shape or pattern of the reflecting zone can be detected provided that these features are separated by at least x millimetres.

Means can be provided to enhance the detection of a retroreflective reflecting zone in the presence of spectral reflection (e.g. reflection from polished parts of the moving article) by using a first light polarizing filter between a light source and a retroreflective reflecting zone and a second light filter polarized at 90 degrees to the first polarizing filter in the path of the received reflected light. In this respect, it is useful to use visible red light TXRX pairs, since suitable polarising filters are currently more readily available in this spectrum. Alternatively, infrared light can be used where red would otherwise be distracting to the user, or a mixture of red and infrared can be used to optimise overall measurement performance and user acceptance.

It is also desirable to use diffuse reflecting zones in some instances (e.g. one side of the surface of a golf ball). Because diffuse reflection is inefficient, the DP(s) may be arranged to have increasing width at increasing range. This is achieved by placing the separation axis (defined above) parallel to the length axis of the slit aperture. In this case it is sometimes advantageous to have large TXRX separation (giving greater observation angles) to enhance diffuse reflection and suppress retroreflective reflection from the same reflecting zone.

Preferred shapes for the reflecting zones have simple geometries such as circular, hemi-spherical (i.e. a golf ball surface), triangular or rectangular. The DP's are preferably arranged to traverse the path of a reflection zone at various positions along the path and at various angles thereto. As a reflection zone travels through the various DPs, data capture circuits record the corresponding time and amplitude response. These data are used to compute the speed, position and direction of

the reflection zone and thus determine the ball and/or clubhead motion. A powerful technique for extracting accurate three-dimensional data of the motion of a reflecting zone as it passes through an array of DP's is the Levenberg-Marquardt method for non-linear estimation. This, and alternative estimation algorithms, require a fairly representative mathematical model of the measurement system and to this end it is advantageous that the reflecting zones have basic geometries that can be described in simple mathematical terms.

The light emission in a DP may be continuous or pulsed. In one preferred embodiment, low duty cycle pulsed emissions with a repetition frequency in the range 10 kHz to 100 kHz are used with measurements coinciding with each pulse. This corresponds to providing measurements of a clubhead and ball positions at intervals of a few millimetres to a fraction of a millimetre. (In a 'full swing' golf shot the clubhead speed at impact is typically in the range 25 m/s to 55 m/s, and ball launch speeds are typically 30% to 60% greater). For applications where the movement of a golf putter is to be measured, the repetition frequency can be much lower (e.g. circa 1 kHz).

The invention will now be further described, merely by way of example, with reference to the accompanying drawings in which:

FIG. 1 is a logic block diagram of a golf range facility according to the invention;

FIG. 2 is a side elevation view of ball launch measuring apparatus according to one embodiment of the invention depicting two possible ball launch scenarios;

FIG. 3 shows a time dependent waveform representing a sensor signal generated in the arrangement of FIG. 2;

FIG. 4 shows a view along arrow A1 in FIG. 2;

FIG. 5 shows time dependent waveforms of representing sensor signals generated in the arrangement of FIG. 4;

FIGS. 6(a) to 6(f) are schematic views of typical detection plane arrangements;

FIG. 7 is a top view of ball launch measuring apparatus according to a second embodiment of the invention where both the clubhead and golf ball are measured during impact;

FIG. 8 is a side view of the clubhead and golf ball of FIG. 7;

FIG. 9 shows a plan view of a golf range outfield according to the invention showing impact sensitive targets and an array of geophones; and

FIG. 10 is a diagram showing some construction details of an impact sensitive target of FIG. 9.

The block diagram of FIG. 1 outlines the top level system for a golf range facility according to one aspect of the invention where several golfers hit golf balls into the same general area and sensing means are provided to describe the outcome and identify the initial tee position of every shot. Blocks representing first, second and Nth golfers using the range are shown at 1, 2 and 3 respectively. The golfers launch golf balls downrange into the flight space 4 at random times and with random distances and direction. For the purpose of system analysis, the flight space 4 can be considered as a flight transfer function with parameters comprising earth's gravity, air temperature & pressure, wind speed & direction and other factors that can affect ball flight such as rain or snow. We assume that the balls land on horizontal, flat terrain, but significant departures from this that would affect the time of landing or distance/deviation of carry, can be built into the flight transfer function. Preferably, all the golf balls used in the facility are of similar construction with nominally equal weight and diameter (which is true by default for all standard golf balls), and of closely similar impact and aerodynamic properties, which again is easily achieved. Each golfer is provided with one launch analyser 5, 6 or 7 that measures the initial velocity and spin vectors of the balls they hit and the exact time of each impact. The data from all the launch analysers are transmitted to a central computer 8.

The distance, deviation and flight duration of each golf shot is predicted by the central computer 8. From these predictions (which require knowledge of the parameters for the flight space, the ball

parameters and the ball launch conditions) every shot made by each golfer can be identified. In practice, it is very difficult to achieve the necessary degree of accuracy to reliably distinguish between two or more shots landing at nearly the same position and time using launch measurements alone and, undesirably, the displayed results can sometimes differ significantly from observed results. To overcome these problems a landing sensors network 12 is provided that accurately measures the actual landing position and the time of landing of each golf ball.

Data from the landing sensors network 12 is transmitted to the central computer 8 that then compares actual outcomes with predicted outcomes and performs a best fit between actual and predicted data so every actual outcome measured by the landing sensors network 12 is attributed to a specific golf shot measured by the individual launch analysers 5, 6 & 7. These actual outcomes are then transmitted to video display units 9, 10 & 11, which provide each golfer with a display of their performance, including information such as the distance and deviation of their recent and previous shots and, if desired, detailed shot by shot measurements of swing parameters and statistical analysis of their overall performance.

The actual landing data is also used to apply corrections to the data generated in each of the launch analysers 5, 6 & 7 and to update the computer model parameters for the flight space transfer function (i.e. wind speed & direction, air temperature & pressure, etc.). The above corrections are generated using iterative algorithms that test where and how much correction is appropriate so after a few results from each launch analyser the predicted and actual data converge (to within very small tolerance). The correction process continues as long as golfers hit balls into the instrumented range and adapts to environmental changes on an hour-to-hour and day-to-day basis. The computer can also monitor long term calibration drift in each launch analyser and elements in the landing sensors network and apply appropriate correction or report that specific components of the facility require maintenance. Optionally, wind and air parameters can be measured by a local weather monitor 13 positioned downrange and transmitted to the central computer to assist the prediction process. By this means the results shown on the video display units 9, 10 & 11 reliably report the correct results corresponding to each golfer's actual shots, and with great precision.

In rare instances, two or even three balls will land together near the same spot and at almost the same time. When this occurs, there is significant probability that the matching process between actual and predicted outcomes will fail to make an absolute true match, but this is of no consequence since the balls in question have carried to virtually the same spot so the result of distance and deviation for each shot is virtually unaffected.

FIG. 2 shows one form of launch analyser according to the invention. A golf ball 21 rests on a rubber tee 22. The tee 22 is semi-permanently fixed to a playing surface or play-off mat 23. Other ball placement arrangements may be adopted. For example, the ball can be placed directly on a mat or on turf, provided that the placement spot is nominally on a known vertical axis in relation to the apparatus.

For convenience, reference axes X, Y and Z are shown in the drawings. The Z-axis is vertical and points upwards. The Y-axis is horizontal and points downrange (i.e. along the general line of flight of a golf shot). The X-axis is orthogonal to Y and Z and points in the general 'heel-to-toe' direction of a clubhead at ball address.

The golf ball 21 is provided with a small retroreflective element 24 adhered to its surface. The area of the element is typically only one hundredth or so of the total ball surface area. For convenience, we refer to the retroreflective element hereinafter as the RE. The RE may be elongate and, prior to a golf shot, positioned at the top dead centre of the ball and aligned along the desired launch direction. Three DP's 25, 26 & 27 are disposed below the ball flight path. As a reflecting surface enters one or other of the DP's, a sensor signal is generated within the sensor enclosure 28. The magnitude of this signal is proportional to the amount of light reflected back to the sensor, which in turn depends on a number of factors including the reflectivity of the surface under the prevailing conditions, the angle of incidence, the range or distance of the reflecting surface to the sensor enclosure and the area of the reflecting surface within the DP. Note that the DP's 25, 26 & 27 are not 'planar' in the strict meaning but have finite thickness. In one preferred arrangement, the thickness of any DP is less than the length of a RE.

The balls are themselves diffusely reflective so a central circular area of a ball passing through a DP can be detected. Thus, three successive instants in time when the centre of a ball coincides with the true central plane in each of the DP's 25, 26 & 27 are detected. The time of impact may be sensed by a microphone or other means and, knowing the above successive instants in time and the positions and the orientations of the DP's 25, 26 & 27 relative to the tee 22, the speed and trajectory of a ball can be found.

After impact from a lofted club such as a driver or iron, the ball travels at high speed substantially along a desired azimuth direction and upwardly at an elevation angle imparted by the club loft. In addition to linear velocity, each ball has backspin due to oblique impact, which again is due to the club loft. As a ball flies up and away from its pre-impact resting position, it rotates backwards so the RE eventually enters the downward facing hemisphere of the golf ball. Because of backspin, the peripheral speed of a ball on its lower (downward facing) surface is greater than the ball translational speed. It follows that the RE's (if facing more or less downwards) pass through DP's at greater speed than the corresponding ball centres. The arrangement is such that the RE's can be detected by at least one DP for the range of backspin rates that are to be encountered. (More than three DP's at different angles can be used to ensure correct operation.) As a RE passes through a DP, its position forward or backward from the ball centre can be detected and this can be converted to a measure of the angle of backspin rotation at the time the ball passes through the DP, which in turn gives an accurate measure of the backspin rate.

For simplicity of description, we show DP 25 angled at 45 degrees to the vertical and tilted towards the tee, DP 26 on the vertical and DP 27 angled at 45 degrees to the vertical and tilted away from the tee. In FIG. 2 we show two possible trajectories with corresponding balls 29 & 30 and RE's 31 & 32 respectively. Ball 29 exhibits high trajectory and high backspin, typical of a shot from a high-lofted iron club, and in FIG. 2 it has rotated through 240 degrees ($2/3$ revolution) when its centre coincides with DP 29. In this case, the centre of RE 31 (being typically 10 millimetres long) has already passed through DP 25 so the sensor signal waveform 40 (shown in FIG. 3) exhibits a high output portion 41 corresponding to the passage of RE 31 through DP 25 prior to the peak 42 of the base signal. The base signal is of lower amplitude than signal portion 41 as it corresponds to the passage of the diffusely reflecting surface of ball 29 passing through DP 25. Although the

reflecting area of RE 31 is much less than the effective reflecting area of the ball, the much greater reflectivity of the retroreflective surface provides the higher strength signal. Note also that signal portion 41 magnitude varies throughout its duration, being lower in magnitude at the leading edge 43 compared to the falling edge 44. The reason for this is that, due to the curvature on the ball surface, the first end of RE 31 to enter DP 25 presents a high 'entrance angle' to the incident light beam forming DP 25, whereas the following end of RE 31 presents a much lower entrance angle. The reflectivity of retroreflective materials increase with lower entrance angles and lower observation angles.

In contrast to ball 29, ball 30 has low trajectory and relatively low backspin, typical of a higher velocity golf shot from a driver or other wood club, and rotates through 135 degrees (3/8 revolution) when its centre coincides with DP 27. In this case, the centre of RE 32 coincides with the centre of the ball at the moment that both pass through DP 27 so in the corresponding sensor signal waveform (shown at 127 in FIG. 5) the high output portion 51 coincides with the peak of the base signal. Note that the peak of signal portion 51 is much flatter than signal portion 41 (in FIG. 3) because in this instance the entrance angle is zero at the centre of RE 32 and still small at both ends of RE 32.

FIG. 4 shows the view along arrow A1 in FIG. 2. This view is on the underside of ball 30 and parallel to DP 27. An additional DP 45 (not shown in FIG. 2) is rotated about the centre axis of DP 27 (i.e. the axis defined by; $X = 0$, $Y = OY + Z$, where OY is the offset between the tee 22 and DP's 25, 26 & 27, measured along the Y-axis). Similarly, additional (but not shown) DP's rotated about axes defined by; $X = 0$, $Y = OY - Z$; and $X = 0$, $Y = OY$ are associated with DP's 25 and 26 respectively. These DP's rotated in the $X = 0$ plane are used to detect any off-centre deviation of the ball or RE.

We show in FIG. 4 that the centre 46 of ball 30 is slightly displaced from the $X = 0$ plane 47 in one direction and RE 32 is also displaced from this plane but in the opposite sense. This offset between ball centre and RE is due to a component of sidespin on the ball, which tilts the spin axis off the horizontal. The degree of this offset advantageously gives a measure of the sidespin on a ball, which is an essential parameter to determine deviation in ball flight. The manner that the

above displacements from the $X = 0$ plane affects the sensor signal waveform 145 for DP 45 relative to the waveform 127 for DP 27 is shown in the traces of FIG. 5. In FIG. 5 the origin ($t = 0$) corresponds to the moment of ball 30 trajectory depicted in FIGS. 2 and 4. For waveform 127, the signal responses due to the ball surface reflection and the RE 32 reflection are symmetric about $t = 0$, indicating that the ball 30 and RE 32 are central in DP 27. For waveform 145, the base signal peak 48 is earlier than $t = 0$, whereas the RE 32 response portion 49 is delayed. These relative time shifts provide a measure of the sidespin magnitude and sense.

The qualitative features of the signal waveforms of FIGS. 3 and 5 are evident, but it is not so obvious how to extract precise data from such waveforms. The preferred method is to use a guess of the ball and RE motion and apply this to a mathematical model of the array of DP's and their response to reflections off a ball and off a RE. The main features of the waveforms allow an initial approximate guess of the ball velocity, trajectory and spin from which model data are generated. The model data and real data are compared and the differences are used to obtain an improved guess (i.e. an improved estimate). We repeat this process until the model data converges to nearly the same as the real data. The above is a simplified description of well-known techniques in engineering generally known as non-linear minimisation or non-linear estimation. One preferred mathematical technique for solving the estimation is the Levenberg-Marquardt method.

To formulate the initial guess, the motion of a ball and its RE are broken down into component parts as follows. When no sidespin is present, the RE rotates about a horizontal axis normal to the line of flight and on a vertical circle of diameter equal to the ball diameter. Superimposed on this spin motion, the spin axis moves at virtually constant velocity along a line normal to the axis. With sidespin, the RE rotates about an axis at a slight tilt angle θ to the horizontal (rarely more than 20 degrees) and on a circle of diameter reduced by $\cos(\theta)$ and again the spin axis moves at constant velocity along a line normal to the spin axis.

FIGS. 6(a) to 6(e) show various arrangements for forming DP's. In FIG. 6(a) a light source (TX) device 60 is separate from a light sensor (RX) device 61 by distance δ , which is preferably less

than 5 millimetres. An optical shield 62 (which may also form an electrical shield) is placed between the two devices and a slit aperture 63, also of width δ , is placed in the field of operation of each device at distance L . The slit aperture 63 is elongate with its length axis normal to the page, so the arrangement forms a DP that is normal to the page. For simplicity, the active areas of each electro-optical device are assumed to be negligibly small so that light rays to or from these devices can be considered to be a point receptor and point source respectively. The light rays beyond the aperture 63 spread out in two wedge shaped volumes 64, 65 where the angle enclosed by each wedge is δ/L radians. A DP 66 is formed in the overlap between the two wedges and provided the width between the devices 60, 61 exactly equals the width of the aperture, the DP 66 has parallel sides and is of width δ . FIG. 6(b) shows the arrangement of FIG. 6(a) in a view normal to the plane of the DP 66, where the length axis of the slit aperture is in the plane of the paper. The DP spreads out in a wide arc, limited by the ends 68, 69 of the slit aperture. In practice, diffraction effects and finite size of the active areas in the devices 60, 61 shape the width profile of the DP 66, but over a useful operating range the thickness is fairly uniform and can be fairly accurately defined for computer modelling purposes.

FIG. 6(c) shows how three DP's 70, 71 & 72 (with centre-planes normal to the page) are formed from one TXRX pair 73 and three slit apertures 74, 75 & 76. The widths of the slit apertures 74, 76 are slightly narrower than the width of aperture 75 to allow for the foreshortening of the TXRX separation when the operating region of the TXRX pair 73 is oblique. This reduces the quantity of transmitted and received light in DP's 70 & 72, but the relatively smaller observation angles partly compensate.

FIG. 6(d) shows how a line array comprising three light emitting devices 77, 78 & 79 and two light sensor devices 80 & 81 form four DP's 82, 83, 84 & 85. In this arrangement, the three light emitters 77, 78 & 79 operate in multiplex mode (i.e. they are switched on, one at a time in succession) so only one or two of the four DP's are operated simultaneously. This arrangement can be expanded to a greater or lesser number of DP's and is useful to scan a stationary RE to detect its exact position before it is set in motion.

FIGS. 6(e) and 6(f) show an alternative arrangement where a wider DP is preferable to detect a golf ball using diffuse reflection off most of the available surface on the golf ball. Here a light emitter device 86 and light sensor device 87 are placed on a line parallel to the length axis of a slit aperture 88. This provides a DP in wedge shape form with increasing width at increasing distance away from the devices 86,87 and thus allows a greater amount of light, compared to the constant width DP's of FIGS. 6(a) to 6(d), to illuminate and reflect back from the diffuse surface of a golf ball. In detecting the position of a golf ball, a narrow DP is not necessary and the width can advantageously increase to slightly less than the ball diameter. This still allows a true peak to form in the sensor signal, which is detectable and corresponds to the ball centre being aligned with the central plane of the DP. By increasing the TXRX separation the observation angle is increased, which makes this type of DP less responsive to RE reflections but does not reduce its response to diffuse reflection. It is thus possible to provide one light sensor device with two multiplexed co-acting light source devices; one closely adjacent and placed on a line normal to the slit aperture axis for optimum RE response and resolution; and the other on a line parallel to the slit aperture and at greater separation for maximum 'whole ball' response and low RE response.

The methods described above can equally well be applied to the scenario of a spot kick on a soccer ball or rugby ball to measure the resultant velocity and spin components. Since a soccer ball has much greater surface area than a golf ball, numerous RE's can be provided on one soccer ball to enhance the measurement capability. Despite the greatly increased ball diameter, the widths of DP's used in this application are preferably still in the range 3 – 5 millimetres or so, since this allows very small observation angles, which greatly enhances reflectivity of the RE's and thus signal strength and their contrast against background. However, to measure the displacement of the entire ball, much wider DP's can be utilised, using the arrangement of FIGS. 6(e) & 6(f).

FIG. 7 is the plan view of an alternative ball launch analyser where the velocity vectors and certain orientations and positions of a club head 90 are sensed prior to impact with a golf ball 91 and only the velocity vectors of the ball are sensed. A sensor enclosure 92 has a DP window face 93 generally parallel but offset from the golf swing and ball trajectory paths and provides a number of DP's 94 crossing the path of the club head and golf ball in the pre-impact and post impact region of a golf shot. The DP's comprise a mixture of normal, angled, narrow width and expanded width

types to fully detect the approach direction (in azimuth and elevation), speed, dynamic loft and offset (in vertical and horizontal sense) of the club head 90 and the launch velocity vectors of the ball. This gives sufficient data to determine the spin vectors of the ball as well as its velocity vectors. From this, a prediction of the subsequent ball flight can be made. Errors in measurement will degrade the accuracy of the flight prediction, but these errors are mainly systematic, especially if known types of club and a known type of ball are used. It is thus possible to correct systematic errors by applying feedback of the actual flight outcome measured by accurate means.

FIG. 8 shows a side-view of the club head 90 and ball 91 as 'seen' by the DP array. The motion of the club head is sensed by tracking a triangular RE 95 attached to the toe of the club head. The leading edge of RE 95 aligns with the face loft of the club head and the centre of the triangle is at a known position relative to the centre of mass (CM) of the club head. These features ensure that the dynamic loft and the "gear effect" offset at impact are sensed.

The contrast of the RE 95 against reflections from the body of the club head can be enhanced by using filters to polarise the transmitted light from each TXRX pair in one direction and a second filter (for each TXRX pair) to polarise the received light at 90 degrees to the emitted light. In general, it is preferred to use infrared TXRX pairs as these are invisible to the golfers, but other light wavelengths such as visible red light may be preferable since polarising filters are more readily at these wavelengths. If necessary, a mixture of light wavelengths can be used to eliminate visible disturbance prior to impact and enhance performance during the impact phase only. Also, the club head body can be sprayed with non-reflective coating prior to attaching its RE. The sensor system can also sense and correct for spurious reflections from unwanted external light sources by detecting ambient signal amplitude just before or after each (pulsed) light emission.

FIG. 9 shows a golf range outfield comprising two targets 100 & 101 and a series of geophones 102. Typically several targets may be distributed down the outfield, but for simplicity we show only two in FIG. 9. The targets comprise impact sensitive panels 103 arranged round their centre flags 104. A data and power link 105 joins all the impact sensing elements (i.e. transducers on the panels 103 and all the geophones 102) to a power supply 106 (if required) and to a central

computer 107, which analyses data from all the sensors and determines when and where every ball lands on the outfield. The data and power link may comprise a 'daisy chain' arrangement using only a single twisted pair sharing signal and power or separate power and signal wires. Other wire-up solutions may be adopted or the data can be radio transmitted with power supplied by battery and/or solar energy converters (this later solution being useful for demountable or portable targets). The area of the individual panels 103 in each target are dimensioned for the required precision and may reduce as targets get closer to the golfers' positions.

FIG. 10 shows some construction details for panels 111 and 112 in a target. The panels are fabricated from fibreglass or similar durable, rigid material. Each panel can be individually coated with a protective coating, which also acts as an impact cushioning member, or a single overall membrane 113 can provide the protection and cushioning. Preferably, the panels are mounted to slope away from the centre flag 114 (or other centre point feature) at least with sufficient gradient to ensure that balls always roll off the target, taking into account the static friction between ball and target outer surface. Each panel is provided with one or more vibration sensors 115 that detect impact and highly compliant shock absorbent material 116 such as foam rubber or the like support the panels on their base structure 117 to 'deaden' the impact (i.e. to eliminate or minimise bounce after impact). This feature ensures that multiple impacts are suppressed and the impact signal picked up by each sensor 115 is of very short duration.

The invention has been described above with particular reference to the motion of a golf clubhead and/or the motion of a golf ball during execution of a golf shot but it will be appreciated that apparatus operating on the principles described above may also be used in measuring parameter relating to the motion of moving articles in other applications.

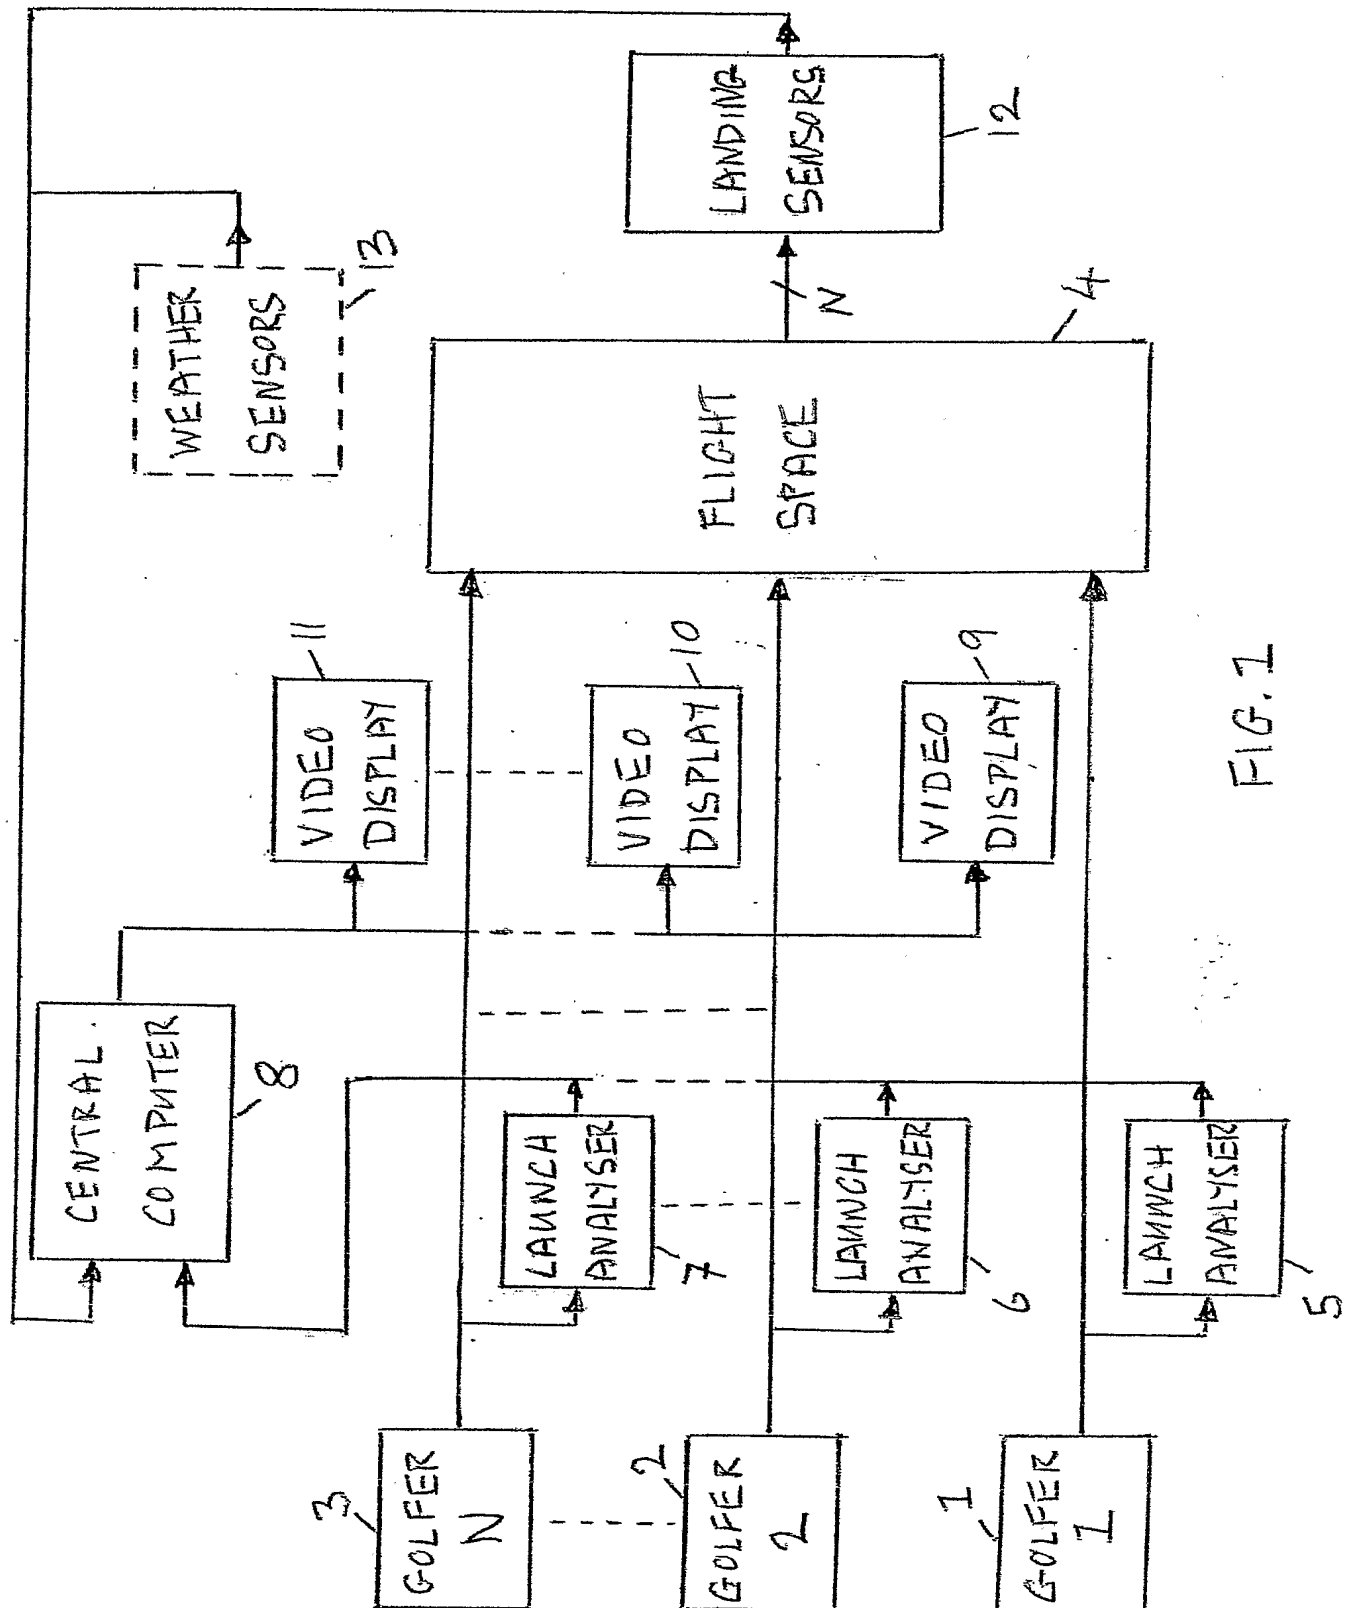


FIG. 1



2/6

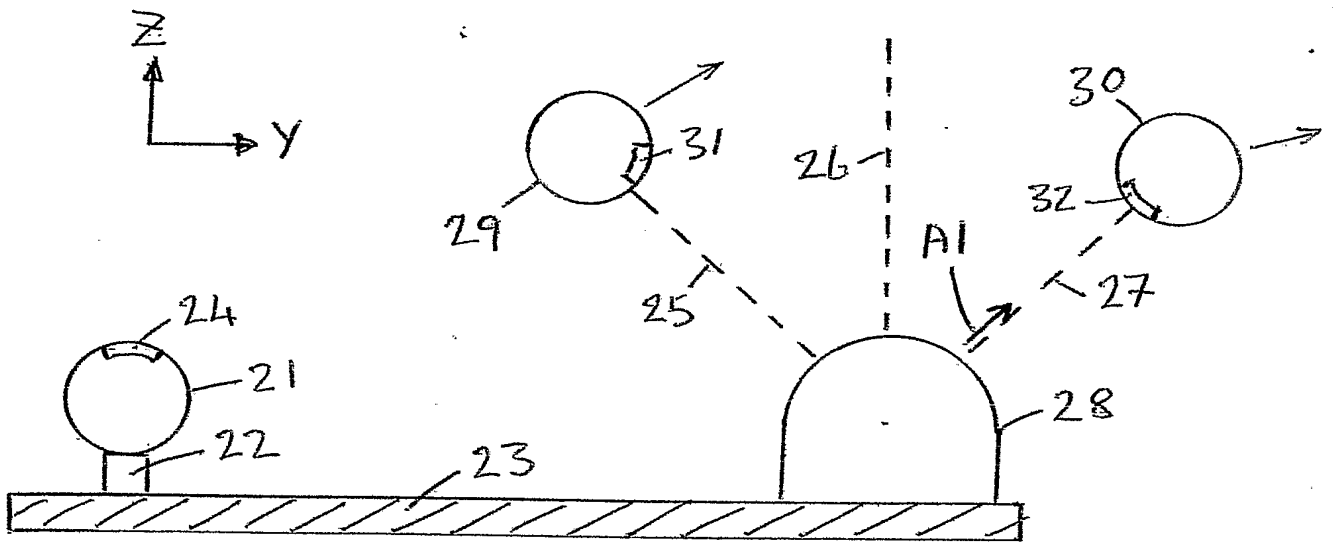


FIG. 2

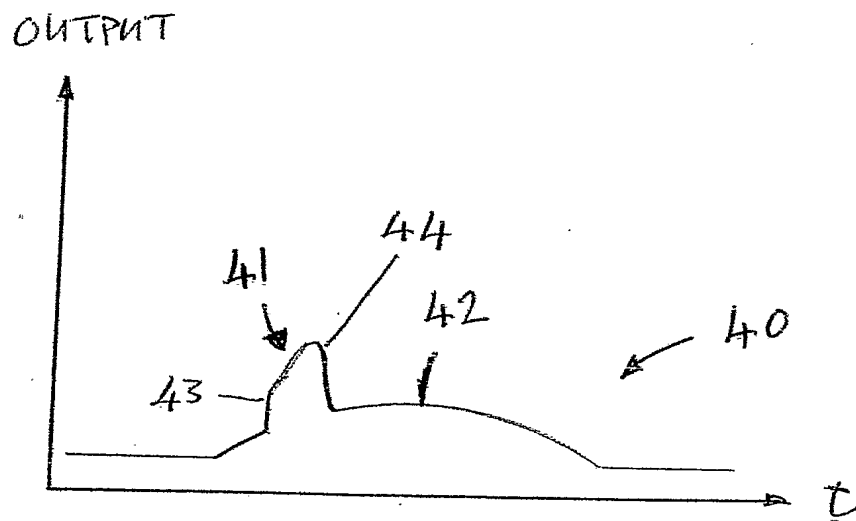


FIG. 3

3/6

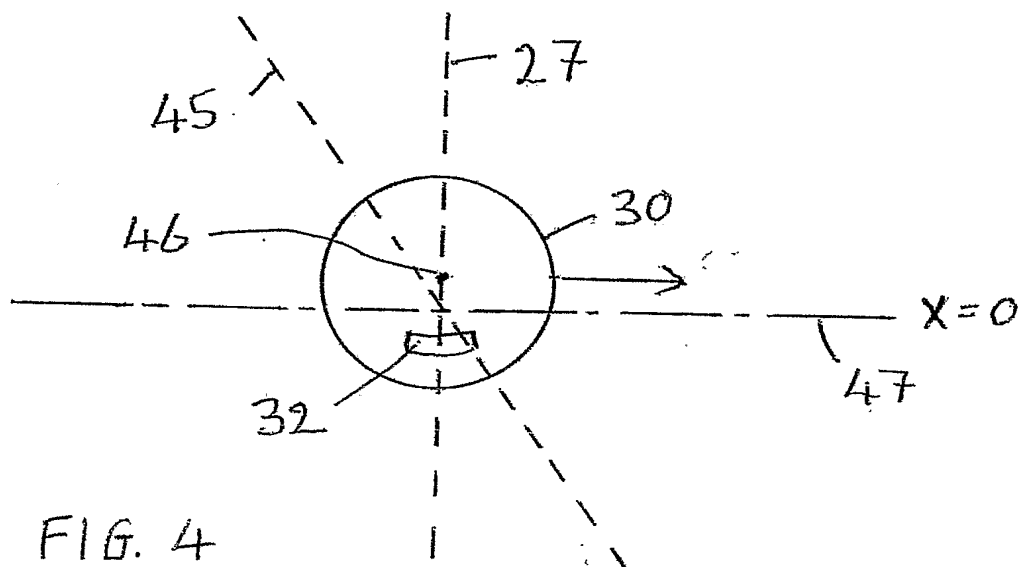


FIG. 4









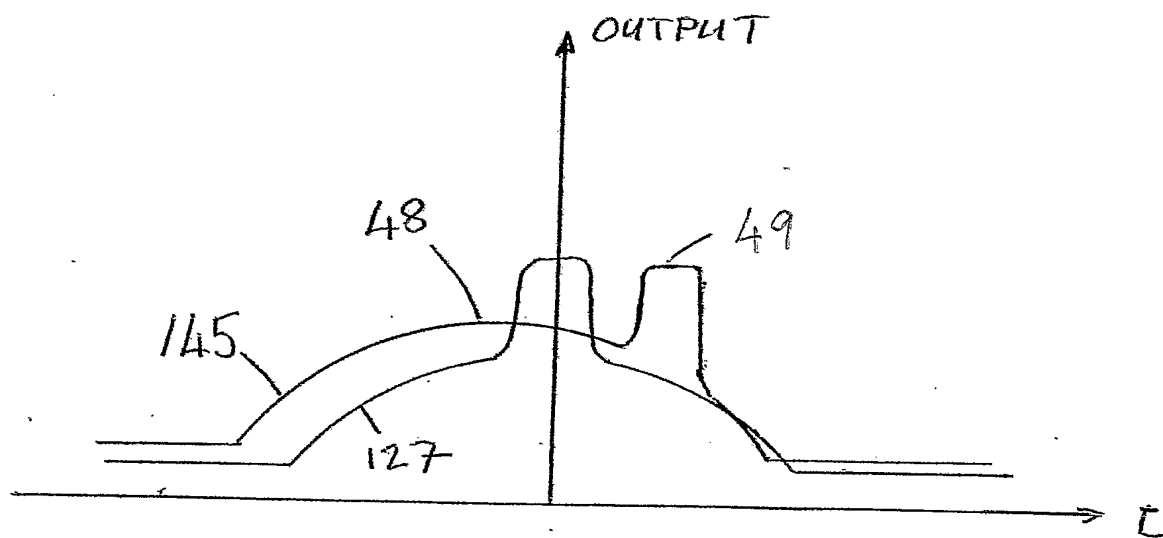


FIG. 5

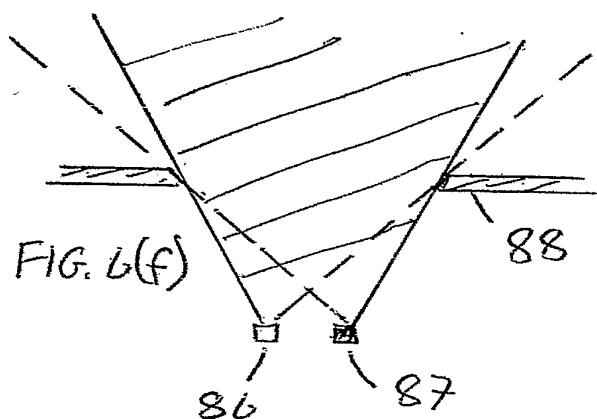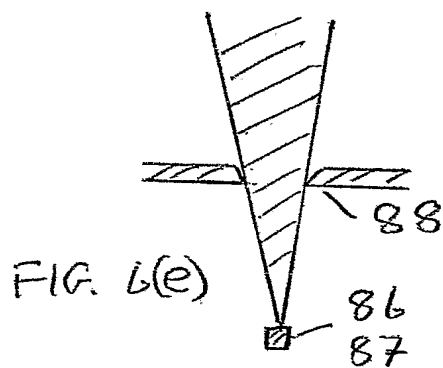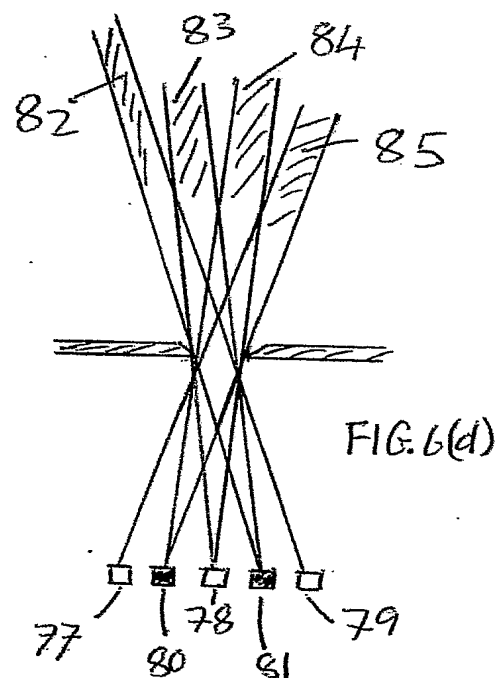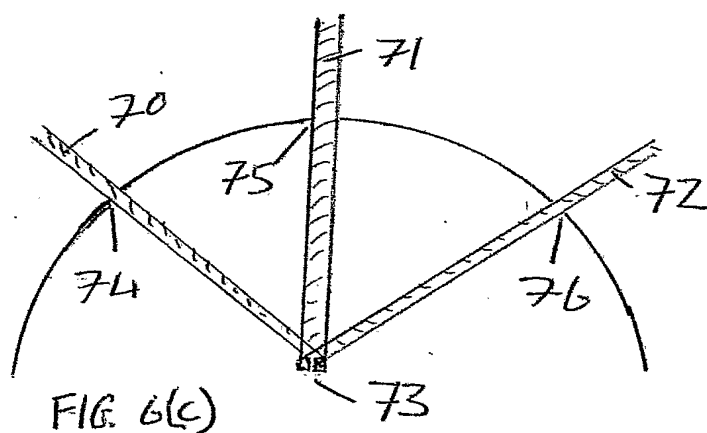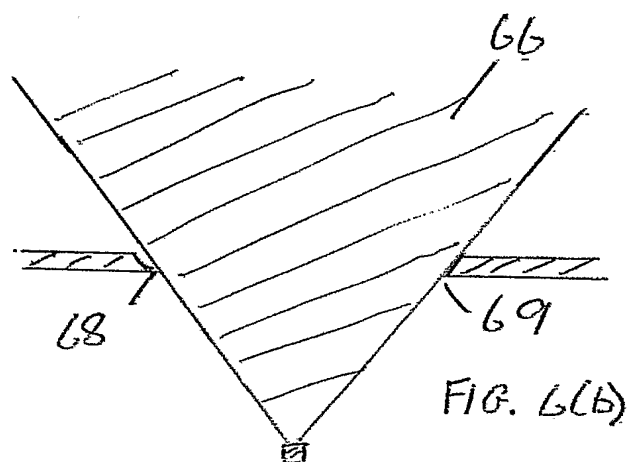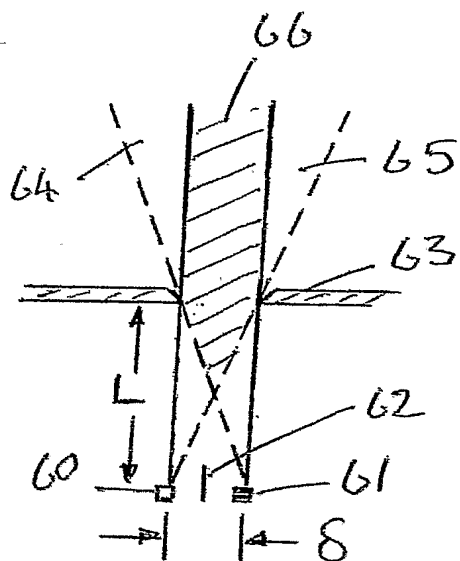

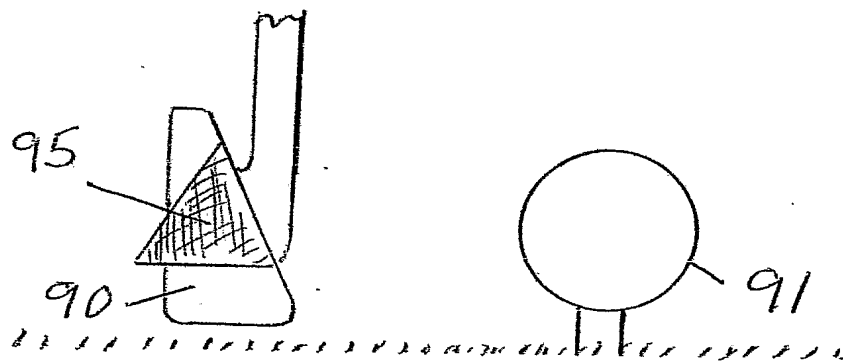

5/6

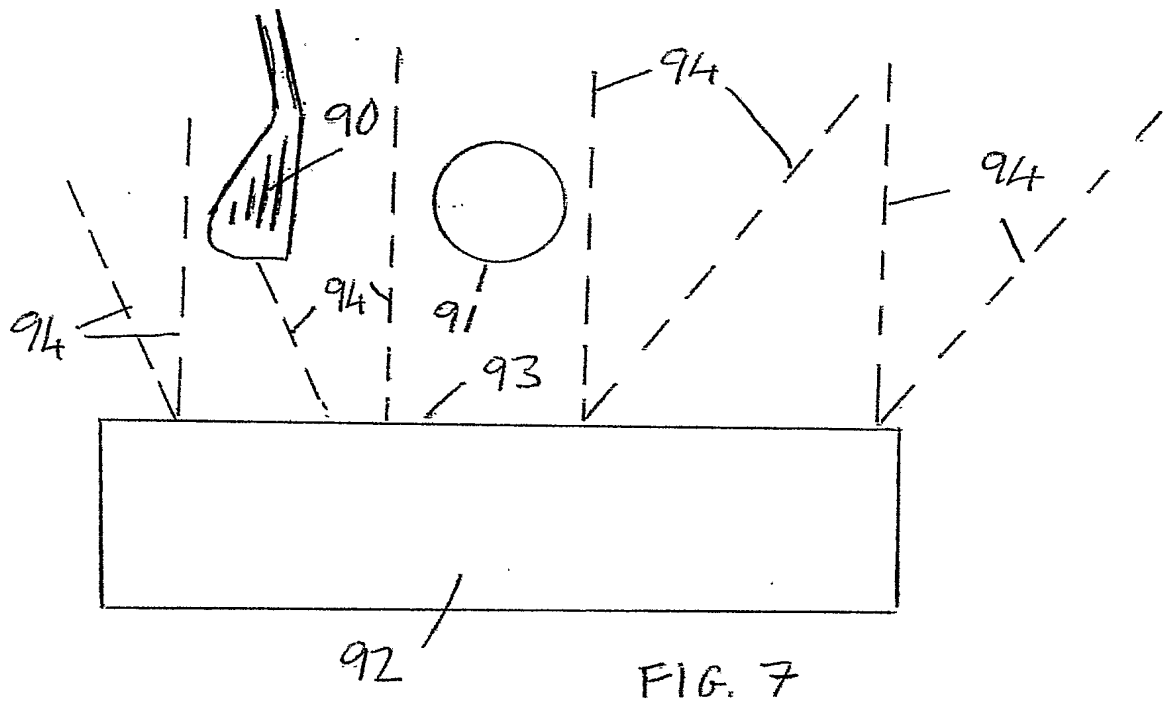

6/6

FIG. 9


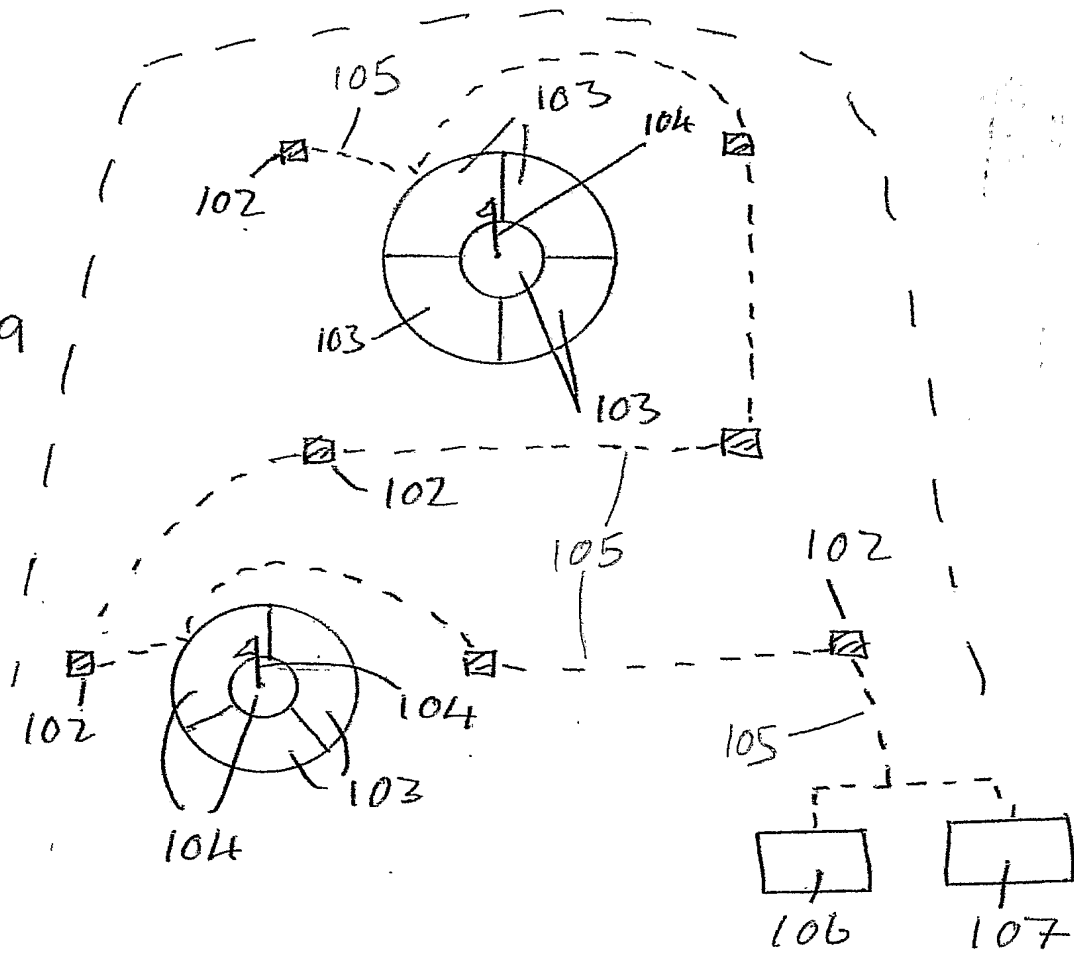


FIG. 10

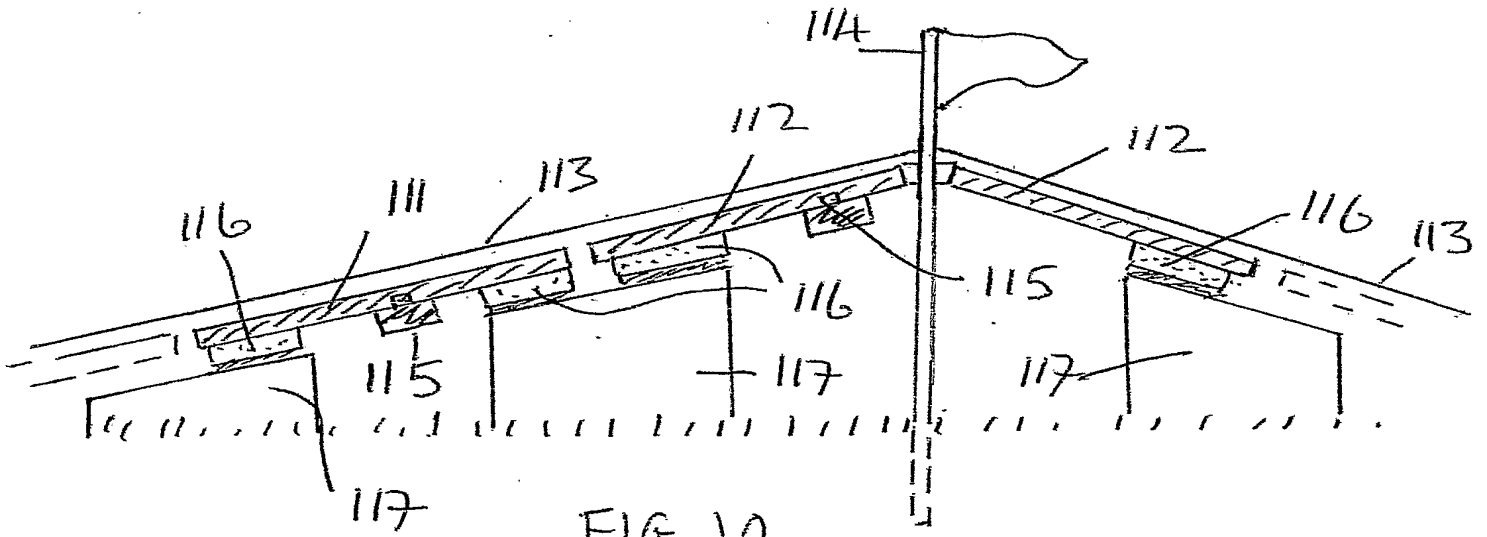

THE PATENT OFFICE

13 APR 2005

Received in Patents
International Unit